English Syntax and Context Free Grammars

COMP-550

Oct 10, 2017

Outline

What is Syntax

English Syntax

Context Free Grammars

Parsing

Syntax

How words can be arranged together to form a grammatical sentence.

- This is a valid sentence.
- *A sentence this valid is.

An asterisk is used to indicate ungrammaticality.

One view of syntax:

Generate all and exactly those sentences of a language which are grammatical

The First Grammarian

वृत्तिः ॥ अञ्चेः पूजायामर्थे त्त्वानिष्ठयोरिडागमा भवाते ।

Panini (Pāṇini) from the 4th century B.C. developed a grammar for Sanskrit.

```
after पू॥

As पृथा or पावित्वा, सोमोतिपृतः, सोमोतिपिततः पृतवान् or पवितवान् ॥ This allows option where by VII. 2. 11 there would have been prohibition. See I. 2. 22.

चस्तिश्चधोरिट् ॥ ५२ ॥ पदानि ॥ चस्ति, श्चभोः, इट् ॥

वृत्तिः ॥ वसतेः श्चभेश्व त्तवानिष्टयोरिडागमो भवति ।

52. The affix ktvå, kta and ktavatu always receive the augment इट् after चस् (चस्ति) and श्चभ् ॥

As उपित्वा, उपितः and उपितवान्, श्वभित्वा, श्वभितवान् ॥ The वस् of the Adadi class will get इट् as it is enumerated in the list of सेट् roots. The repetition of इट् shows that the rule is invariable, the 'optionally' of the preceding sûtra does not affect it.


अश्वे: पूजायाम् ॥ ५३ ॥ पदानि ॥ अश्वे:, पूजायाम् ॥
```

Source: https://archive.org/details/ashtadhyayitrans06paniuoft

What We Don't Mean by Grammar

Rules or guides for how to write properly

e.g.,

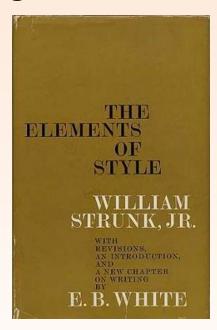

These style guides are **prescriptive**. We are concerned with **descriptive** grammars of naturally occurring language.

Basic Definitions Terms

- grammaticality
- prescriptivism vs descriptivism
- constituency
- grammatical relations
- subcategorization

Constituency

A group of words that behave as a unit

Noun phrases:

 computational linguistics, it, Justin Trudeau, three people on the bus, "Jean-Claude Van Damme, the Muscles from Brussels"

Adjective phrases:

• blue, purple, very good, ridiculously annoying and tame

Tests for Constituency

1. They can appear in similar syntactic environments.

```
I saw ...

it

Jean-Claude Van Damme, the Muscles from Brussels
three people on the bus

*Van

*on the
```

Tests for Constituency

2. They can be placed in different positions or replaced in a sentence as a unit.

[Jean-Claude Van Damme, the Muscles from Brussels], beat me up.

It was [Jean-Claude Van Damme, the Muscles from Brussels], who beat me up.

I was beaten up by [Jean-Claude Van Damme, the Muscles from Brussels].

He beat me up. (i.e., J-C V D, the M from B)

Tests for Constituency

3. It can be used to answer a question.

```
Who beat you up?
[Jean-Claude Van Damme, the Muscles from Brussels]
*[the Muscles from]
```

Grammatical Relations

Relationships between different constituents

Subject

- Jean-Claude Van Damme relaxed.
- The wallet was stolen by a thief.

(Direct) object

The boy kicked the ball.

Indirect object

She gave <u>him</u> a good beating.

There are many other grammatical relations.

Subcategorization

Notice that different verbs seem to require a different number of **arguments**:

```
relax 1 subj
steal* 2 subj, dobj
kick 2 subj, dobj
give 3 subj, iobj, dobj
```

^{*}the passive changes the subcategorization of the verb

More Subcategorization

Some other possibilities:

- want 2 subj, inf. clause
- I want to learn about computational linguistics.
- apprise 3 subj, obj, pobj with of
- The minister apprised him of the new developments.
- different 2 subj, pobj with from/than/to
- This course is different [from/than/to] what I expected.

Short Exercise

Identify the prepositional phrase in the following sentence. Give arguments for why it is a constituent.

The next assignment is due on Friday, October 20th.

Formal Grammars

Since we are computational linguists, we will use a formal computational model of grammar to account for these and other syntactic concerns.

Formal grammar

Rules that generate a set of strings that make up a **language**. (In this context, language simply refers to a set of strings.)

Why?

- Formal understanding lets us develop appropriate algorithms for dealing with syntax.
- Implications for cognitive science/language learning

FSAs and Regular Grammars

We've already seen examples of languages defined by formal grammars before this class!

FSAs to describe aspects of English morphology

- An FSA generates a regular language
- FSAs correspond to a class of formal grammars called regular grammars

To describe the syntax of natural languages (with multiple constituents, subcategorization, etc.), we need a more powerful class of formal grammars – **context free grammars** (**CFG**s).

Context Free Grammars (CFG)s

Rules that describe what possible sentences are:

```
S \rightarrow NP VP
NP \rightarrow this
VP \rightarrow V
V \rightarrow is \mid kicks \mid jumps \mid rocks
```

Constituent Tree


Trees (and sentences) generated by the previous rules:


$$S \rightarrow NP VP$$

$$VP \rightarrow V$$

$$NP \rightarrow this$$

$$V \rightarrow is \mid rules \mid jumps \mid rocks$$



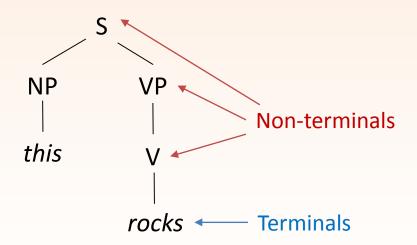

Formal Definition of a CFG

A 4-tuple:

- N set of **non-terminal** symbols
- Σ set of **terminal** symbols
- R set of **rules** or **productions** in the form $A \to (\Sigma \cup N)^*$, and $A \in N$
- S a designated **start symbol**, $S \in N$

Extended Example

Let's develop a CFG that can account for verbs with different subcategorization frames:

intransitive verbs	relax	1	subj
transitive verbs	steal, kick	2	subj, dobj
ditransitive verbs	give	3	subj, iobj, dobj

Undergeneration and Overgeneration

Problems with above grammar:

Undergeneration: misses valid English sentences

- The boy kicked the ball softly.
- The thief stole the wallet with ease.

Overgeneration: generates ungrammatical sentences

- *The boy kick the ball.
- *The thieves steals the wallets.

Extension 1

Let's add adverbs and prepositional phrases to our grammar

Recursion

Consider the following sentences:

- The dog barked.
- I know that the dog barked.
- You know that I know that the dog barked.
- He knows that you know that I know that the dog barked.

•

In general:

S -> NP VP VP -> Vthat Sthat

VP -> Vintr Vthat-> *know*

Vintr -> barked Sthat -> that **S**

Recursion

This recursion in the syntax of English means that sentences can be infinitely long (theoretically).

 For a given sentence S, you can always make it longer by adding [I/you/he know(s) that S].

In practice, the length is limited because we have limited attention span/memory/processing power.

Exercise

Let's try to fix the subject-verb agreement issue:

Present tense:

Singular third-person subject -> verb has affix of -s or -es

Otherwise -> base form of verb

(to be is an exception, along with other irregular verbs)

Dependency Grammar

Grammatical relations induce a **dependency relation** between the words that are involved.


The student studied for the exam.

Each phrase has a **head word**.

- the student studied for the exam
- the <u>student</u>
- for the exam
- the <u>exam</u>

Dependency Grammar

We can represent the grammatical relations between phrases as directed edges between their heads.

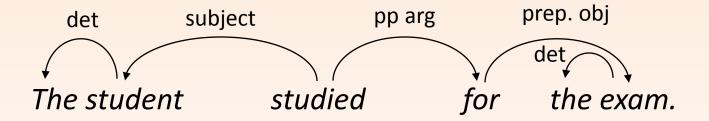

This lets us get at the relationships between words and phrases in the sentence more easily.

Who/what are involved in the studying event?

student, for the exam

Converting between Formalisms

Dependency trees can be converted into a standard constituent tree deterministically (if the dependency edges don't cross each other).

Constituent trees can be converted into a dependency tree, if you know what is the **head** of the constituent.

Let's convert some of our previous examples...

Crossing Dependencies

Dependencies can cross.

Especially if the language has freer word order:

Er hat mich versucht zu erreichen.

Er hat versucht mich zu erreichen.

He tried to reach me.

These have the same literal meaning.

Crossing Dependencies Example

What would the dependency edges be in these cases?

```
Er hat versucht, mich zu erreichen.

HE HAS TRIED ME TO REACH
```

```
Er hat mich versucht zu erreichen.
HE HAS ME TRIED TO REACH
```


Notice the discontinuous constituent that results in the second case.

Are Natural Languages CFGs?

Recall that a formal language is defined to be a set of strings constructed over a specified vocabulary

Are natural languages CFGs? i.e., can we define each natural language (e.g., English, French, German, etc.) as a CFG?

Other possibilities: Chomsky hierarchy

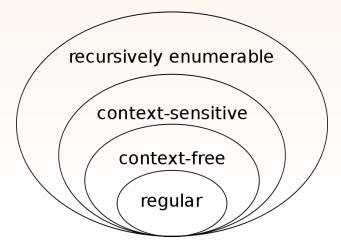

Cross-serial Dependencies

Swiss German (Shieber, 1985) and Bambara (Culy, 1985) have structures that generate strings which cannot be captured by CFGs (cross-serial dependencies):

$$a^m b^n c^m d^n$$

Relies on following assumption:

- m and n can be arbitrarily large values
- strings are either in a language or not (grammatical or ungrammatical)

May not be the most useful question to ask after all

Parsing

Input sentence, grammar → output parse tree

Parsing into a CFG: constituent parsing

Parsing into a dependency representation: dependency

parsing

Difficulty: need an efficient way to search through plausible parse trees for the input sentence

Parsing into a CFG

Given:


- 1. CFG
- 2. A sentence made up of words that are in the terminal vocabulary of the CFG

Task: Recover all possible parses of the sentence.

Why *all* possible parses?

Syntactic Ambiguity

I shot the elephant in my pyjamas.

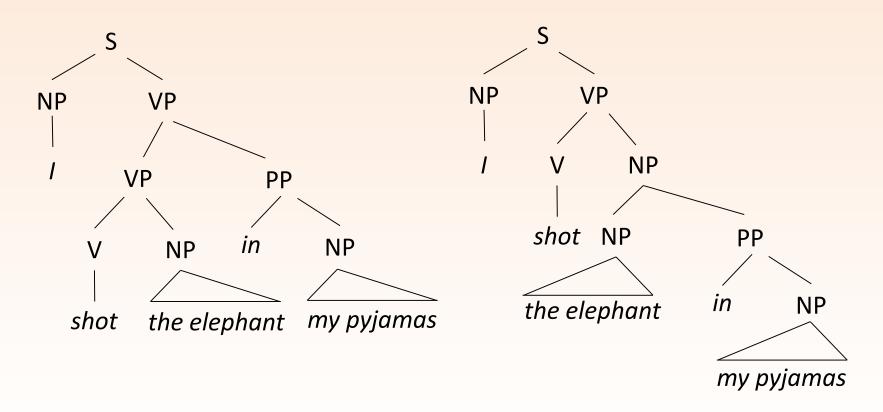

Types of Parsing Algorithms

Top-down

Start at the top of the tree, and expand downwards by using rewrite rules of the CFG to match the tokens in the input string

e.g., Earley parser

Bottom-up

Start from the input words, and build ever-bigger subtrees, until a tree that spans the whole sentence is found

e.g., CYK algorithm, shift-reduce parser

Key to efficiency is to have an efficient search strategy that avoids redundant computation

CYK Algorithm

Cocke-Younger-Kasami algorithm

- A dynamic programming algorithm partial solutions are stored and efficiently reused to find all possible parses for the entire sentence.
- Also known as the CKY algorithm

Steps:

- 1. Convert CFG to an appropriate form
- 2. Set up a table of possible constituents
- 3. Fill in table
- 4. Read table to recover all possible parses